





マルチアイボルト

MULTI EYE BOLT

ME・HBM(ハイブリッド)

HBM3630
(ハイブリッド)

ME3028C

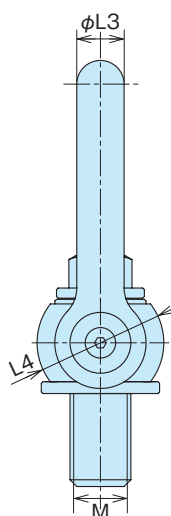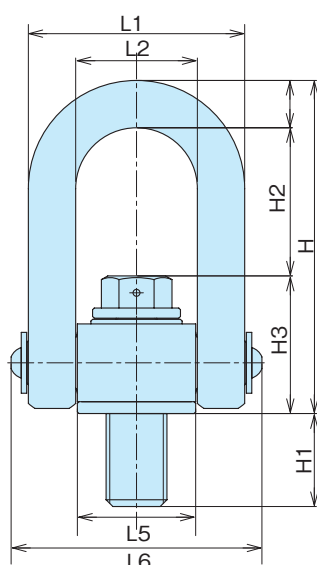

- 特 徴**
Feature
- 横吊り、斜め吊り、引き起こし作業時にも安全に使用できます。
 - 重量物の吊り上げ軸に対して360度回転し、吊り上げ方向に対しても180度回転します。
 - JISアイボルトの使用荷重の約3倍の使用が可能。
 - HBM品番はハイブリッドタイプで、小型化され、使いやすく、作業効率をさらにUPさせます。
- It can be safely used for horizontal suspension, diagonal suspension, and lifting work.
- Rotates 360 degrees with respect to the lifting axis of heavy objects and also rotates 180 degrees with respect to the lifting direction.
- Approximately three times the working load of JIS eyebolts can be used.
- The HBM part number is a hybrid type that is compact, easy to use, and improves work efficiency.

- 材 質** ●クロモリブデン鋼 (SCM435)
- 用 途** ●金型、土木、建築、造船、精密・工作機械、運搬業などの重量物の吊り下げ等。

- Material** ●Chrome molybdenum steel (SCM435)
- Specific Use** ●Suspension of heavy objects such as molds, civil engineering, construction, shipbuilding, precision/machine tools, and transportation.

品 番 Product No.	使用荷重Ton (KN)	取付けボルトM	L1	L2	φL3	L4	L5	L6	H	H1	H2	H3	ボルト締付トルクの 目安(kgf.m)	自重(kg) Weight	単 価 Price
ME0808C	0.3(2.94)	M8	41	25	8	28	24	50	71	11	33	30	0.8~1.5	0.18	¥9,000
ME1008C	0.5(4.90)	M10	41	25	8	28	24	50	71	16	32	31	1.0~2.5	0.19	¥9,700
ME1210C	0.8(7.85)	M12	50	30	10	32	29	62	88	21	40	38	1.5~4.0	0.35	¥10,800
ME1414C	1.2(11.77)	M14	65	37	14	42	36	79	109	27	47	48	4.0~10.0	0.72	¥16,500
ME1614C	1.6(15.69)	M16	65	37	14	42	36	79	109	27	47	48	4.0~10.0	0.75	¥12,600
ME1818C	1.8(17.65)	M18	83	47	18	50	45	100	135	31	60	57	7.0~15.0	1.32	¥22,000
ME2018C	2.5(24.52)	M20	83	47	18	50	45	100	135	31	60	57	7.0~15.0	1.38	¥16,500
ME2222C	3.1(30.40)	M22	102	58	22	60	56	121	157	37	72	63	10.0~25.0	2.31	¥27,300
ME2422C	3.6(35.30)	M24	102	58	22	60	56	121	157	37	72	63	10.0~25.0	2.38	¥20,500
ME2728C	4.8(47.07)	M27	128	72	28	75	70	150	197	50	90	79	12.0~35.0	4.70	¥39,600
ME3028C	5.8(56.87)	M30	128	72	28	75	70	150	197	50	90	79	12.0~35.0	4.90	¥28,600
ME3632C	8.0(78.45)	M36	154	90	32	90	85	176	235	57	112	91	15.0~50.0	7.60	¥38,500
ME4236C	10.0(98.06)	M42	176	104	36	105	100	200	275	67	130	109	18.0~60.0	11.80	¥63,800
ME4842C	15.0(147.00)	M48	200	116	42	120	110	226	309	73	140	127	30.0~80.0	18.20	¥130,700
HBM2416	2.0(19.6)	M24	65	37	14	42	36	79	109	35	45	50	10.0~25.0	0.83	¥16,400
HBM2420	2.8(27.4)	M24	83	47	18	50	45	100	135	35	58	59	10.0~25.0	1.42	¥20,200
HBM3020	3.2(31.8)	M30	83	47	18	50	45	100	135	45	58	59	12.0~35.0	1.52	¥21,800
HBM3024	4.2(41.2)	M30	102	58	22	60	56	120	157	45	68	67	12.0~35.0	2.46	¥25,500
HBM3624	4.6(45.9)	M36	102	58	22	60	56	120	157	55	68	67	15.0~50.0	2.63	¥29,100
HBM3630	6.5(63.7)	M36	128	72	28	75	70	150	197	55	88	81	15.0~50.0	4.91	¥35,200
HBM4230	7.0(68.6)	M42	128	72	28	75	70	150	197	65	88	81	18.0~60.0	5.14	¥46,200
HBM4236	8.5(83.3)	M42	154	90	32	90	85	176	235	65	109	94	18.0~60.0	7.76	¥56,100
HBM4836	9.0(88.2)	M48	154	90	32	90	85	176	235	70	109	94	30.0~80.0	8.00	¥78,700
HBM4842	12.0(117.7)	M48	176	104	36	105	100	200	275	70	126	113	30.0~80.0	11.90	¥105,600
HBM6448	20.0(196.0)	M64	200	116	42	120	110	226	309	90	133	134	30.0~80.0	18.70	¥169,400

※使用荷重とは、1個のマルチアイボルトに負荷することが許容できる静動荷重のことです。